



Performance and Radiation Patterns of A Reconfigurable Plasma Corner-Reflector Antenna

Mohd Taufik Jusoh Tajudin, Mohamed Himdi, Franck Colombel, Olivier Lafond

► To cite this version:

Mohd Taufik Jusoh Tajudin, Mohamed Himdi, Franck Colombel, Olivier Lafond. Performance and Radiation Patterns of A Reconfigurable Plasma Corner-Reflector Antenna. IEEE Antennas and Wireless Propagation Letters, 2013, 99, pp.1. 10.1109/LAWP.2013.2281221 . hal-00862667

HAL Id: hal-00862667

<https://hal-univ-rennes1.archives-ouvertes.fr/hal-00862667>

Submitted on 17 Sep 2013

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Performance and Radiation Patterns of A Reconfigurable Plasma Corner-Reflector Antenna

Mohd Taufik Jusoh, Olivier Lafond, Franck Colombel, and Mohamed Himdi

Abstract—A novel reconfigurable plasma corner reflector antenna is proposed to better collimate the energy in forward direction operating at 2.4GHz. Implementation of a low cost plasma element permits beam shape to be changed electrically. The maximum measured gains are 5.7dBi, 10.8dBi and 10.5dBi for the omnidirectional, single and double beam shapes respectively.

Index Terms—Corner reflector antenna, plasma corner reflector antenna, plasma antenna, reconfigurable antenna, reconfigurable plasma antenna.

I. INTRODUCTION

SINCE many years ago, reflecting surfaces have been used widely in order to steer a beam in the forward direction in antenna systems. Basic reflector antenna that uses reflecting surfaces is known as corner-reflector antenna (CRA). The CRA was first introduced in 1940 by John D. Kraus [1] and known to have about 9-14 dBi gain. Most of CRA use classical antennas such as dipole as a feeder and two flat sheets intersecting at an angle (known as included angle) as the reflector elements. However the simplest design of CRA will suffer from wind effect if it is mounted in the open space. Therefore, one way to eliminate this problem is by replacing the flat surfaces with wire grids. Indeed, its performance is comparable with flat reflecting sheets. Basic guide to design CRA is accessible and well documented in many antenna reference books such as in [2], [3]. Other than forwarding plane wave, circularly polarized CRA was first introduced in [4]. The earliest study on the effect of several lengths and widths of reflecting surfaces on CRA radiation pattern has been carried out in [5]. In addition, many techniques to increase gain of CRA were proposed in [6-8]. A quad CRA in

[9] and reactively controlled CRA in [10] were proposed to work at 2.4GHz. A mechanical approach of achieving variable beamwidth by changing the included angle of CRA was proposed in [11]. The design was simulated and measured with the feed-to-vertex spacing is fixed. Generally, beam shaping and beam steering by using plasma reflector are very promising profiles, especially ability of plasma to be reconfigured electrically which is impossible to be done by metal elements.

Unlike, parabolic reflectors, CRAs are uncomplicated in design since they eliminate the crucial part of focal point for a driven dipole and the action of the reflector is not critical as to frequency [1]. In fact, the parabolic reflectors provide slight or no improvement over CRA of comparable size in terms of performance [1]. John D. Kraus claimed that by changing the feed-to-vertex spacing, s with the same included angle, α the beam can be varied from single beam into dual beams. However, with this approach, the s needs to be altered mechanically. For that reason, as proposed in this letter, instead of changing the s , an electrical switchable beam shape is implemented. There is no need to vary the location of the feeder since this method exploiting plasma characteristics [12], [13]. Only by energizing and de-energizing several plasma elements in seconds, omnidirectional pattern can be easily transformed into several forward beams. In other antenna design [14], an idea of using plasma posts for reconfigurable disc antenna was theoretically investigated.

To the best of our knowledge, there is no realization of CRA at any frequency band that has used other than metallic materials as an element except in a simulation proposed in [15]. Hence, this letter is aimed to present simulation and experimental results in order to verify the performance and the radiation patterns of a novel reconfigurable plasma CRA. Three different beam shapes are offered alternately, and the CRA is operating at 2.4GHz. The implementation of compact fluorescent lamps (CFL) has reduced the risk of complexity of impedance tuning which is vital when dealing with parasitic elements in designing antenna arrays. Other than antenna reconfigurability profile, reduced radar cross section (RCS) [16], [17], better gain, good cross-polarization, and high front to back ratio, the overall system is unique because it implements commercially available CFL [18] in order to stay considerably small, compact in size and low cost, if one compares to the elements used in [12] and assumed in [19].

This work was supported in part by the Malaysian Ministry of Education (MOE), formerly known as Ministry of Higher Education (MOHE).

Mohd Taufik Jusoh (mohd-taufik.jusoh-tajudin@univ-rennes1.fr), Olivier Lafond (olivier.lafond@univ-rennes1.fr), Franck Colombel (franck.colombel@univ-rennes1.fr) and Mohamed Himdi (mohamed.himdi@univ-rennes1.fr) are with the Institute of Electronics and Telecommunications of Rennes, UMR CNRS 6164, University of Rennes 1, Campus de Beaulieu, Rennes Cedex 35042, France.

Mohd Taufik Jusoh is also with the Department of Electrical and Electronic, Faculty of Engineering, National Defence University of Malaysia, Kem Sungai Besi, 57000 Kuala Lumpur, Malaysia (taufik@upnm.edu.my).

The realized model was fabricated on a 3mm thick ground plane as shown in Figure 2. The power to energize the 9Watts CFLs is supplied by a set of electronic ballasts with specification of 220-240V, 50-60Hz. Each of the electronic ballast is controlled by a small single-pole switch and requires 4 wires to be connected to each of the CFLs. Thus, to realize the prototype, 24 electronic ballasts and 24 switches are

compulsory. Simplicity, low noise and compact in size are the reasons why electronic ballasts are chosen instead of magnetic ballasts. However, a trade off in terms of increment numbers of connecting wires exists. To simplify, the requirement of 2G7 socket was removed since the CFLs were inserted from the bottom of the ground plane. The CFLs must be vertically aligned with respect to the ground plane surface. Each of the wires is connected to CFL pins by using ordinary wire connectors. A monopole antenna with diameter of 2mm is connected to the feeding line via a 50Ω SMA female connector.



Fig. 2. Realized model with 24 elements.

V. RESULTS AND DISCUSSION

Series of measurements were carried out to validate the simulation results. The measurements were performed in a SATIMO 32 anechoic chamber with the peak gain accuracy is equals to $\pm 0.8\text{dBi}$. Implementation of two reflectors on a single ground plane enables single beam and dual beam shapes to be realized just at your fingertips. The single shape can be changed into dual beam shape within split seconds or even micro seconds with fast switching scheme. In fact, the fastest time taken to change the beam shape from one to another only depends on the time taken by the plasma to decay [13], [17]. Evolution of the beam shapes is shown in Figure 3 and Figure 4, for the H-plane and the E-plane respectively. The radiation pattern for the plasma in OFF state (de-energized plasma) is also shown in the figures to ease comparison.

Unlike the omnidirectional beam shape, the single beam shape could be formed by switching ON all plasma elements with the s is equal to 0.5λ , while elements with the s is equal to λ are switched OFF. If doing otherwise, a double beam shapes will show up. If all elements are switched ON, the single beam remains without allowing the double beams to emerge. This is an alternative to form single beam shape.

The similarity between simulation and measurements results can be seen from these figures showing that the beam shape of the CRA can be changed from single beam to dual beam shapes and back to classical omnidirectional beam shape alternately. The beam is focused at broadside direction with 3dB beamwidth equals to $\pm 20^\circ$, and the beam is transformed into double beams at ϕ equals to $\pm 30^\circ$. The 3dB beamwidth for each of the double beams is $\pm 10^\circ$. The null is observed at ϕ equals to 0° in the H-plane which is below -15dB and better result can be seen in the measurement polar plot.

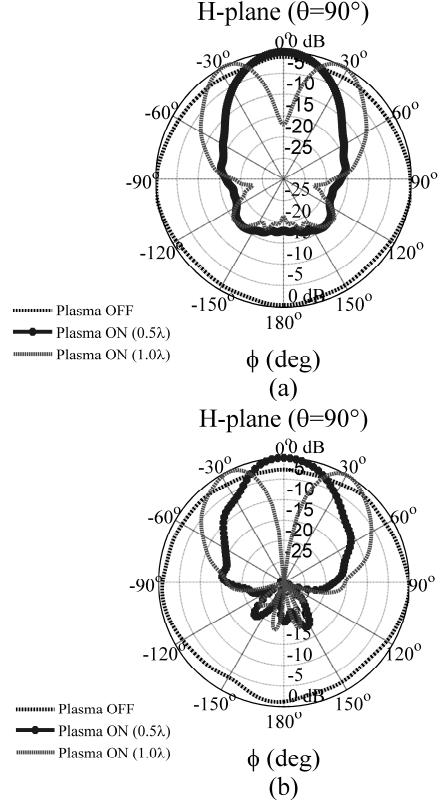


Fig. 3. Normalized H-plane radiation patterns, E_θ component at 2.4GHz. (a) Simulation. (b) Measurement.

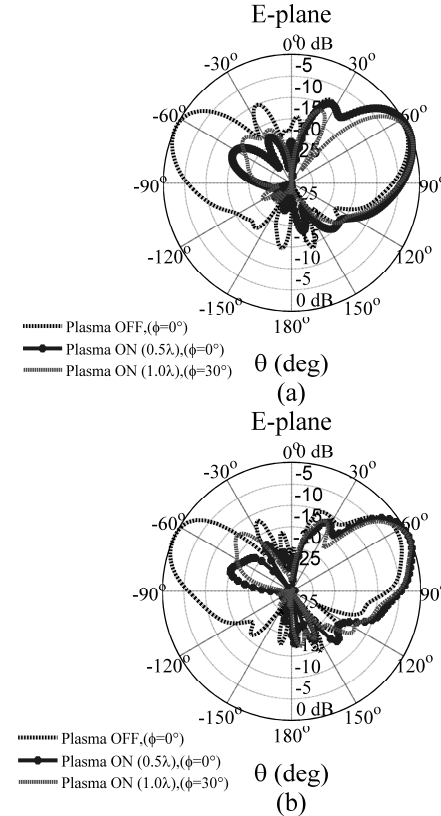


Fig. 4. Normalized E-plane radiation patterns, E_θ component at 2.4GHz. (a) Simulation. (b) Measurement.

The simulated and measured S_{11} are shown in Figure 5. In all configurations, the antenna is matched at 2.4GHz. Wider bandwidths are seen in the measurement results for all cases with respect to the simulation ones are due to mutual coupling effect between the elements. It is worth to mention that, bandwidth more than 1GHz (42%) is achieved when the s is equal to half lambda. There are insignificant differences between simulated and measured gains which are less than 1dBi at 2.4GHz for all cases. The simulated and measured

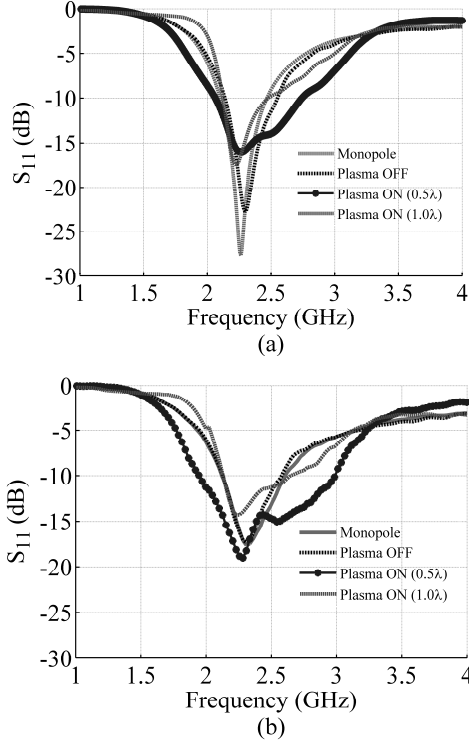


Fig. 5. S_{11} magnitude parameter comparison. (a) Simulation. (b) Measurement.

gain patterns are shown in Figure 6. The measured gains are 5.7dBi, 10.8dBi and 10.5dBi for the cases of plasma OFF state, s equals to 0.5λ and s equals to λ , respectively.

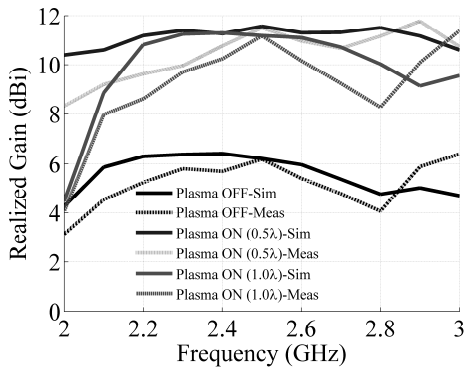


Fig. 6. Simulated (solid lines) and measured (dotted lines) gains for the three states; 1) OFF state, 2) ON state for $s=0.5\lambda$ and 3) ON state for $s=\lambda$.

VI. CONCLUSION

In this letter, a novel reconfigurable plasma CRA is proposed. The novel reconfigurable plasma CRA offers three

beam shapes which are electrically switchable from one to another. Up to our knowledge, this is the first work that has validated such design which offers changeable beam shape.

VII. ACKNOWLEDGMENT

The authors acknowledge Laurent Cronier from IETR and Jérôme Sol from INSA, Rennes for their technical support.

REFERENCES

- [1] John D. Kraus, "The corner-reflector antenna," *Proceeding of the IRE*, pp. 513-519, 1940.
- [2] Constantine A. Balanis, "Reflector antennas," in *Antenna theory : analysis and design* 3rd ed., John Wiley and Sons, Inc., Publication New Jersey: Hoboken, 2005, pp. 883-892.
- [3] John D. Kraus, Ronald J. Marhefka, "Corner reflectors," in *Antennas for all applications* 3rd ed., McGraw-Hill Higher Education, New York, 2002, pp. 352-365.
- [4] Oakley M. Woodward Jr., "A circularly-polarized corner reflector antenna," *IRE Trans. on Antennas and Propag.*, pp. 290-297, 1957.
- [5] A. C. Wilson, H. V. Cottony, "Radiation patterns of finite-size corner-reflector antennas," *IRE Trans. on Antennas and Propag.*, pp. 144-157, 1960.
- [6] Naoki Inagaki, "Three dimensional corner-reflector antenna," *IEEE Transaction on Antennas and Propagation*, pp. 580-582, July 1974.
- [7] Ali Harmouch, Chady El Moucary, Moustafa Ziade, Julie Finianos, Christelle Akkari, Simon Ayoub, "Enhancement of directional characteristic of corner reflector antennas using metallic scatters," *19th International Conference on Telecommunications (ICT2012)*, 2012.
- [8] Hassan M. Elkamchouchi, Cylindrical and three-dimensional corner reflector antennas, *IEEE Trans. on Antennas and Propag.*, Vol. AP-31, No. 3, pp. 451-455, May 1983.
- [9] D. C. Chang, B. H. Zeng, J. C. Liu, "Reconfigurable angular diversity antenna with quad corner reflector arrays for 2.4GHz applications," *IET Microwaves, Antennas and Propagation*, pp. 522-528, 2009.
- [10] Themistoklis D. Dimousios, Stelios A. Mitilineos, C. Panagiotou, Christos N. Capsalis, "Design of a corner-reflector reactively controlled antenna for maximum directivity and multiple beam forming at 2.4GHz," *IEEE Trans. on Antennas and Propag.*, Vol. 59, No. 43, pp. 1132-1136, April 2011.
- [11] U. O. Sterr, A. D. Olver and P. J. B. Clarricoats, "Variable beamwidth corner reflector antenna," *Electronics Letters*, Vol. 34, No. 11, pp. 1050-1051, 28th May 1998.
- [12] Theodore Anderson, "Fundamental plasma antenna theory," in *Plasma Antennas*, Artech House, MA: Norwood, 2011, pp. 31-36.
- [13] John Philip Rayner, Andrian Philip Whichello, Andrew Desmon Cheetham, "Physically characteristics of plasma antennas," *IEEE Transaction on Plasma Science*, Vol. 32, No. 1, pp. 269-281, February 2004.
- [14] Graziano Cerri, Roberto De Leo, Valter Mariani Primiani, Carlo Monteverde, Paola Russo, "Design and prototyping of a switching beam disc antenna for wideband communications," *IEEE Trans. on Antennas and Propag.*, Vol. 54, No. 12, pp. 3721-3726, December 2006.
- [15] B. H. Henin, M. H. Al Sharkawy and A. Z. Elsherbeni, "Enhanced performance of corner reflector antenna using metamaterial cylinders," *The Second European Conference on Antennas and Propagation (EuCAP 2007)*, 2007.
- [16] Igor Alexeff, Ted Anderson, Sriram Parameswaran, Eric P. Pradeep, Jyothi Hulloli, Pashant Hulloli, "Experimental and theoretical results with plasma antennas," *IEEE Trans. on Plasma Sci.*, Vol. 34, No. 2, pp. 166-172, April 2006.
- [17] Igor Alexeff, Ted Anderson, Esmali Farshi, Naresh Karnam, Nanditha Reddy Pulasani, "Recent results for plasmas," *Phys. Plasmas* 15, 057104 (2008).
- [18] <http://www.havells-sylvania.com/en/products/0025902>
- [19] X. P. Wu, J.M. Shi, Z. S. Chen, B. Xu, "A new plasma antenna of beam-forming," *Progress in Electromagnetics Research*, Vol. 126, pp. 539-553, 2012.
- [20] <http://www.cst.com/>
- [21] Umran S. Inan, Marek Golkowski, "Introduction" in *Principles of plasma physics for engineers and scientists*, Cambridge University Press, UK: Cambridge, 2011, pp. 1-13.